

701-S




HP/KW	7.5/5.6
SWEEP OF DISC	27" (685.8 mm)
ABRASIVE PRESSURE	440 lbs (200 kg)
WIDTH	28" (711 mm)
LG (HANDLE UP)	29-1/4" (743 mm)
LG (HANDLE DOWN)	56-1/2" (1435 mm)
HEIGHT	54" (1371 mm)
NET WEIGHT	775 lbs (352 kg)
SHIPPING WEIGHT	860 lbs (390 kg)
WATER TANK	7 gal (26.5 l)
POWER CORD	100 ft (30.5 m)

- Stainless steel water tank
 - Stainless steel guards
 - Wet/Dry setup
 - Variable speed or magnetic start
 - Direct drive, NO belts
 - Leveling system
 - Adjustable handle bar
-
- 7.5 HP - 230V, single phase, variable speed
 - 7.5 HP - 230V, single phase, single speed
 - 7.5 HP - 230V, three phase, variable speed
 - 7.5 HP - 230V, three phase, single speed
 - 7.5 HP - 460V, three phase, variable speed
 - 7.5 HP - 460V, three phase, single speed

PRODUCTION RATES

- Mastic removal rate of 350 sq ft per hour
- Thin-set removal rate of 400 sq ft per hour
- Thin-mil coating removal of 200 sq ft per hour
- Concrete polishing rate of 450 sq ft per polishing pad per hour (depending on grit)
- Rough terrazzo rate of 600 sq ft per day

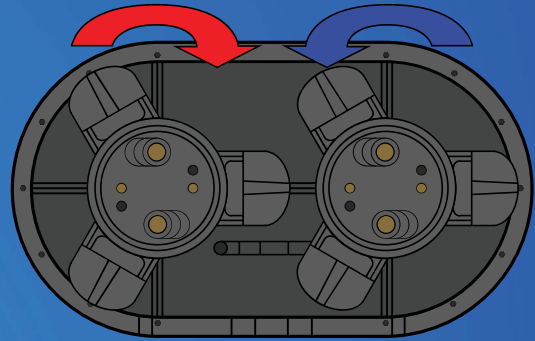

Opposite rotating heads mean the operator does NOT fight the machine.

95+ YEARS



Terrco® Inc.

222 1st Avenue NW • Watertown, SD 57201

Phone: (605) 882-3888 • Fax: (605) 882-0778

Website: www.terrco.us • Email: info@terrco.us

