

# Model 2000




|                   |                    |
|-------------------|--------------------|
| HP/KW             | 15/11.2 or 10/7.5  |
| SWEEP OF DISC     | 22-1/2" (571.5 mm) |
| ABRASIVE PRESSURE | 650 lbs (295 kg)   |
| WIDTH             | 24" (610 mm)       |
| LENGTH            | 67-1/2" (1715 mm)  |
| HEIGHT            | 52" (1320 mm)      |
| NET WEIGHT        | 950 lbs (431 kg)   |
| SHIPPING WEIGHT   | 1050 lbs (476 kg)  |
| WATER TANK        | 20 gal (75 l)      |
| POWER CORD        | 100 ft (30.5 m)    |

- Stainless steel water tank
- Stainless steel guards
- Wet/Dry setup
- Variable speed or magnetic start (3 phase only)
- Direct drive, NO belts

- 10 HP - 230V, single phase
- 10 HP - 230V or 460V, three phase
- 15 HP - 230V or 460V, three phase

## PRODUCTION RATES

- Mastic removal rate of 800 sq ft per hour
- Thin-set removal rate of 1,200 sq ft per hour
- Thin-mil coating removal of 600 sq ft per hour
- Concrete polishing rate of 2,000 sq ft per polishing pad per hour (depending on grit)
- Rough terrazzo rate of 1,000 sq ft per day

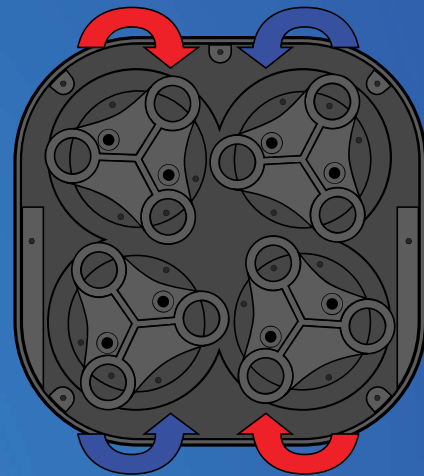

Opposite rotating heads mean the operator does NOT fight the machine.

95  
YEARS  
+



**Terrco® Inc.**

222 1st Avenue NW • Watertown, SD 57201

Phone: (605) 882-3888 • Fax: (605) 882-0778

Website: [www.terrco.us](http://www.terrco.us) • Email: [info@terrco.us](mailto:info@terrco.us)

