

Model 3100-3P




| | |
|-------------------|-------------------|
| HP/KW | 25/18.6 |
| SWEEP OF DISC | 28" (711 mm) |
| ABRASIVE PRESSURE | 1090 lbs (494 kg) |
| WIDTH | 29-1/2" (749 mm) |
| LENGTH | 72-1/4" (1835 mm) |
| HEIGHT | 52" (1320 mm) |
| NET WEIGHT | 1425 lbs (646 kg) |
| SHIPPING WEIGHT | 1625 lbs (737 kg) |
| WATER TANK | 20 gal (75 l) |
| POWER CORD | 100 ft (30.5 m) |

- Stainless steel water tank
- Stainless steel guards
- Wet/Dry setup
- Direct drive, NO belts
- Leveling system
- 230V or 460V (three phase only)
- single or variable speed

PRODUCTION RATES

- Mastic removal rate of 1,250 sq ft per hour
- Thin-set removal rate of 1,800 sq ft per hour
- Thin-mil coating removal of 1,000 sq ft per hour
- Concrete polishing rate of 2,750 sq ft per polishing pad per hour (depending on grit)
- Rough terrazzo rate of 1,500 sq ft per day

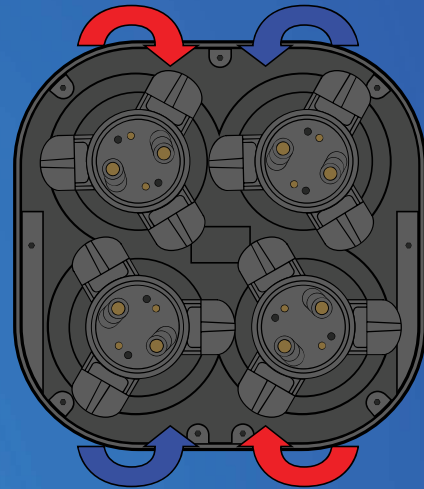

Opposite rotating heads mean the operator does NOT fight the machine.

95
YEARS
+

Terrco® Inc.

222 1st Avenue NW • Watertown, SD 57201

Phone: (605) 882-3888 • Fax: (605) 882-0778

Website: www.terrco.us • Email: info@terrco.us

