

Model 3100-SP




HP/KW	25/18.6
SWEEP OF DISC	28" (711 mm)
ABRASIVE PRESSURE	1090 lbs (494 kg)
WIDTH	29-1/2" (749 mm)
LENGTH	72-1/4" (1835 mm)
HEIGHT	52" (1320 mm)
NET WEIGHT	1475 lbs (670 kg)
SHIPPING WEIGHT	1675 lbs (760 kg)
WATER TANK	18 gal (68 l)
POWER CORD	100 ft (30.5 m)

- Stainless steel water tank
- Stainless steel guards
- Wet/Dry setup
- Variable speed or magnetic start
- Direct drive, NO belts
- Self-propelled

- 230V or 460V (three phase only)

PRODUCTION RATES

- Mastic removal rate of 1,250 sq ft per hour
- Thin-set removal rate of 1,800 sq ft per hour
- Thin-mil coating removal of 1,000 sq ft per hour
- Concrete polishing rate of 2,750 sq ft per polishing pad per hour (depending on grit)
- Rough terrazzo rate of 1,500 sq ft per day

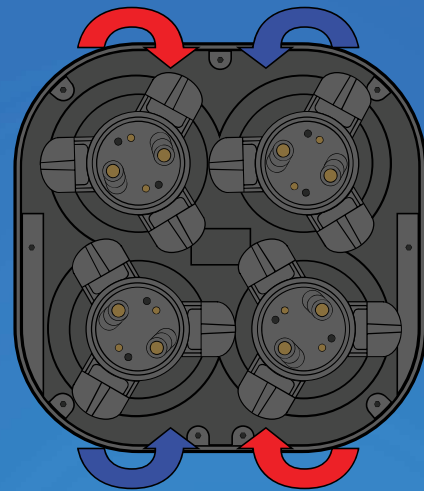

Opposite rotating heads mean the operator does NOT fight the machine.

95
YEARS
+



Terrco® Inc.

222 1st Avenue NW • Watertown, SD 57201

Phone: (605) 882-3888 • Fax: (605) 882-0778

Website: www.terrco.us • Email: info@terrco.us

